

STREET

EDGE

& B E Y O N D

ENCLOSURE  
USER GUIDE



## INTRODUCTION

This instruction manual is for your safety and must be adhered to at all times. Please read and ensure that you fully understand the installation and set up procedures as explained. If you are unclear on the installation or set up of your EDGE speakers please contact your nearest authorised EDGE dealer.

### Contents

EDGE enclosure  
Manual  
Warranty card  
Sticker

### WARNING

DO NOT EXPOSE THIS PRODUCT TO DAMP OR MOISTURE - doing so may result in fire, shock or damage to the product.

BEFORE WIRING DISCONNECT THE CABLE FROM THE POSITIVE BATTERY TERMINAL - failure to do so may result in electric shock or injury.

ENSURE GOOD AND CORRECT CONNECTIONS - failure to make the correct connections may result in fire or damage to the product.

DO NOT USE ANY FUNCTIONS OF THIS EQUIPMENT THAT MAY TAKE YOUR CONCENTRATION AWAY FROM DRIVING YOUR VEHICLE - do not set up your amplifier whilst driving, doing so may result in an accident. For prolonged setting up, make sure that your vehicle is stationary and in a safe location.

KEEP THE VOLUME AT A LEVEL SO YOU CAN STILL HEAR OUTSIDE NOISE - failure to do this may result in an accident. EDGE equipment is capable of producing sound levels that can permanently damage your hearing. EDGE recommends caution when listening at high volume. For safe and enjoyable listening the sound should be comfortable and clear without distortion.

### CAUTION

Never connect any speaker lead to the car chassis. This can cause severe damage to your speaker / car radio / amplifier.

Before drilling or cutting any holes, investigate the layout of your vehicle thoroughly.

Use caution when working near the fuel / hydraulic lines and electrical wiring.

Observe the correct polarity when wiring, improper phasing may cause a loss of bass response.

Ensure that no moving parts catch on the speaker or grill (e.g. window or door handles, or window glass inside the door)

### Run in procedure

EDGE recommends that you follow the run in procedure for the subwoofer detailed below. When your Subwoofer is used for the first time, like most brand new items it is naturally very stiff and rigid. It will take time for the moving parts of this Subwoofer to loosen up before the Subwoofer will be ready to deliver its full potential.

For the first 30 hours it is recommended that you play the Subwoofer initially at low to medium volumes, gradually increasing the volume level as time progresses.

As a guide, if you listen to your Subwoofer for 1 hour every day it will take a month for the subwoofer to run in properly.

You will notice a big change in the sound of the Subwoofer over this period. As the spider and surround begin to run in the sound will get deeper and harder, also the output of the Subwoofer will increase as the suspension loosens up.

The Subwoofer is like your car's engine, it needs a few thousand miles before you can drive it to its full potential. Driving it into the redline from the first day will mean engine damage is certain and will not be covered by warranty.

Failure to follow this simple procedure is the most common reason for a Subwoofer to fail after a very short period of time.

### Installation


The most common place to mount a bass enclosure is in the luggage compartment of the vehicle.

Where in the luggage compartment it is mounted will have an effect on the sound produced allowing the user to tailor the sound to best suit their musical tastes.


For example if the enclosure is mounted facing the rear bumper, the bass produced will be noticeably deeper than if it is fired into the rear seat.

Do not be afraid to experiment with positioning as a little time and effort can yield great improvements in sound.

**NOTE** - when you have chosen your mounting position please ensure that the enclosure is securely mounted in place and cannot move or come into contact with objects in the luggage area as damage to the enclosure or subwoofer will not be covered under warranty. It is also advisable to use additional luggage straps to secure the enclosure

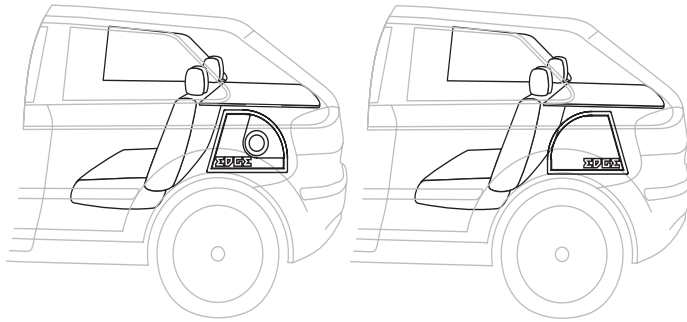

**Wiring**

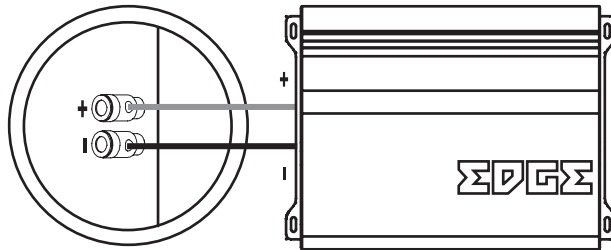

**Limited Warranty**

All EDGE goods are covered by a full 12 months manufacturers warranty. Valid from the date of the original receipt and proof of purchase. In order to validate this warranty, the warranty card should be returned to EDGE within seven days of the original purchase date. The original receipt and packaging should also be kept for this 12 month period.

If at any stage during the warranty period you have a problem with the product then it should be returned to the point of purchase in its original packaging, complete and with no items missing.

If the store is unable to fix the product it may have to be returned to EDGE this process takes around 7 working days.

A full description of EDGE's warranty information can be found on our website:  
[www.edgcaraudio.com/warranty](http://www.edgcaraudio.com/warranty)

A written version can also be obtained from  
 EDGE warranty department  
 PO Box 11000  
 B75 7WG

**Copyright**

All content included in this manual such as text, graphics, logos, icons, images data, the selection and arrangement thereof, are the property of EDGE Audio (herein referred to as "EDGE", "us" or "we") and its affiliate or their content and technology providers, and are protected by United Kingdom and International copyright laws. All rights reserved.

**Trademarks**

EDGE ED2™, EDGE ED3™, EDGE ED4™, EDGE ED5™, EDGE ED6™, EDGE ED7™, EDGE Street™ and EDGE Loud™ and all stylised representations of product names, or the abbreviations of product names, as logos are all trademarks of EDGE. Graphics and logos are trademarks or trade dress of EDGE Audio or its subsidiaries.

EDGE's trademarks and trade dress may not be used in connection with any product or service that is not EDGE's, in any manner that is likely to cause confusion among customers or in any manner that disparages or discredits EDGE. All other trademarks not owned by EDGE or its subsidiaries that appear in this manual are the property of their respective owners, who may or may not be affiliated with, connected to, or sponsored by EDGE or its subsidiaries.

We reserve the right to make needed changes or improvements to the product and this manual, without informing the customer about this in advance

<b>Model</b>	<b>EDB10</b>	<b>EDB12</b>	<b>EDB15</b>
Driver	ED510	ED512	ED515
Enclosure impedance	1 or 4 Ohm	1, 4 or 8 Ohm	1 or 4 Ohm
RMS power	250 watts	600 watts	350 watts
Peak power	750 watts	1800 watts	1050 watts
Recommended amplifier	ED71200/72500/ ED7400/7800/71600	ED71200/72500/ ED7400/7800/71600	ED71200/72500/ ED7400/7800/71600



**EDGE**

**AUCTION**

LIVE  
BY IT 